
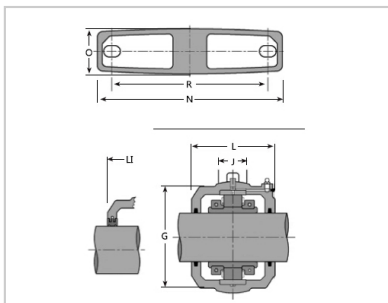


## Split Bearings

d 35-75mm-100 B 75M100 C 75MP03

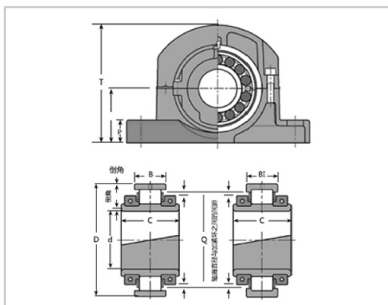

### Roller Bearing :

|                          |           |
|--------------------------|-----------|
| Shaft Diameter mm :      | 75        |
| Reference1 :             | 100 B 75M |
| Basic load rating kN :   | 91        |
| Basic load rating kN :   | 128       |
| Basic load rating kN :   | 7         |
| Basic load ratingKN :    | 4125      |
| Principal Dimensionsmm : | 114.30    |
| Principal Dimensionsmm : | 48.0      |
| Principal Dimensionsmm : | 27.0      |
| Principal Dimensionsmm : | 27.0      |
| Principal Dimensionsmm : | 102       |
| Axial Movement mm :      | 3.5       |
| Axial Movement mm :      | 7         |
| Mass kg :                | 1.2       |

### Cartrdges :

|                                     |           |
|-------------------------------------|-----------|
| ReferenceCartridge for Felt seals : | 100 C 75M |
| ReferenceCartridge for ATL seals :  | 100 C 03  |
| Principal DimensionsJ :             | 134.94    |
| Principal DimensionsG :             | 32        |
| Principal DimensionsL :             | 104       |
| Principal                           | 104       |

DimensionsL1 :

Masskg : 3.6

Plummer block  
 housings :

Refer ence : P03

Hmm : 80

RMin : 226

RMax : 242

Romm : -

Smm : -

BoltsNo. : 2

BoltsMetric Size : M16

BoltsInch Size : 5/8"

N : 280

O : 70

P : 32

T : 180

Masskg : 4.9

Shaft diametermm : 75

: