


Screw Rod Support Bearings

Non bolt installation ZKLN-2Z.2RSd40_one hundred-**ZKLN4075-2RS**

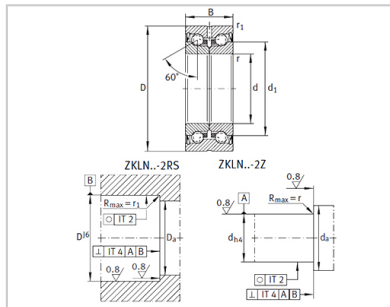

Bearing number : ZKLN4075-2RS

Weightm ≈kg : 0.61

Dimensions(mm) :

d-0.005 :	40
Tolerance :	0/-0.005
D-0.010 :	75
Tolerance :	0/-0.01
B -0.25 :	34
d :	58
r min :	0.3
r min :	0.6

Installation
dimension(mm) :

D max :	67
d min :	50

Basic load ratingaxial :

DynamicN :	43000
StaticN :	101000
limitspeed nGgreenmin – 1 :	1800
Bearing Frictiontorque MRL Nm :	0.7
Axial stiffness CaL N/ μ m :	1000
OverturningstiffnessckL Nm/ mrad :	550
Mass moment of inertia 1) Mm kg · cm2 :	2.26
Axial eat4) μ m :	2.5
Bearing number 1 :	ZM40
Bearing number 2 :	AM40

Lockingtorque3) MA Nm :	55
----------------------------	----

AxialpreloadN :	13412
-----------------	-------

: