


Screw Rod Support Bearings

Non bolt installation ZKLN-2Z.2RSd40_one hundred-ZKLN4090-2Z2)

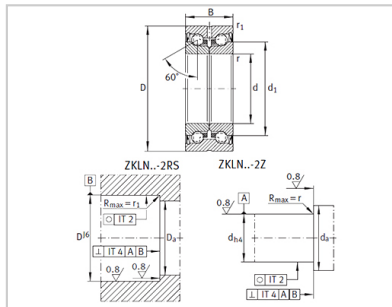

Bearing number : ZKLN4090-2Z2)

Weightm ≈kg : 0.95

Dimensions(mm) :

d-0.005 :	40
Tolerance :	0/-0.005
D-0.010 :	90
Tolerance :	0/-0.01
B -0.25 :	46
d :	65
r min :	0.6
r min :	0.6

Installation
dimension(mm) :

D max :	80
d min :	56

Basic load ratingaxial :

DynamicN :	72000
StaticN :	149000
limitspeed nGgreenmin – 1 :	3100
Bearing Frictiontorque MRL Nm :	0.65
Axial stiffness CaL N/ μ m :	1200
OverturningstiffnessckL Nm/ mrad :	750
Mass moment of inertia 1) Mm kg · cm2 :	5.5
Axial eat4) μ m :	2.5
Bearing number 1 :	ZMA40/6 2
Bearing number 2 :	AM40

Lockingtorque3) MA Nm :	110
----------------------------	-----

AxialpreloadN :	25185
-----------------	-------

: