


Screw Rod Support Bearings

Non bolt installation ZKLN-2Z.2RSd40_ one hundred-ZKLN5090-2Z

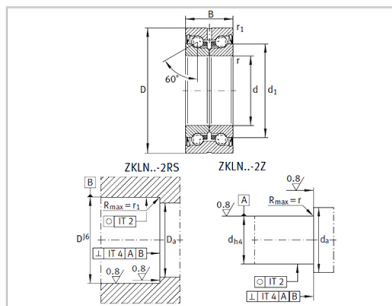

Bearing number : ZKLN5090-2Z

Weightm $\approx$ kg : 0.88

Dimensions(mm) :

d-0.005 : 50

Tolerance : 0/-0.005

D-0.010 : 9

Tolerance : 0/-0.01

B-0.25 : 34

d : 72

r min : 0.3

r min : 0.6

Installation
dimension(mm) :

D max : 82

d min : 63

Basic load rating_{axial} :

DynamicN : 46500

StaticN : 126000

```
limitspeed          3000
nGgreenmin - 1 :
```

Bearing Frictiontorque	0.45
MRL Nm :	

Axial stiffness CaL	1250
N/μ m :	

Overturningstiffness	1000
Nm/ mrad :	

Mass moment of inertia 5.24
1) $\text{Mm kg} \cdot \text{cm}^2$:

Axial eat4) μm : 2.5

Bearing number 1 : ZM50

Bearing number 2 : AM50

Lockingtorque3) MA Nm :	85
----------------------------	----

AxialpreloadN :	17009
-----------------	-------

: