


Screw Rod Support Bearings

Non bolt installation ZKLN-2Z.2RSd40_one hundred-**ZKLN50110-2RS2)**

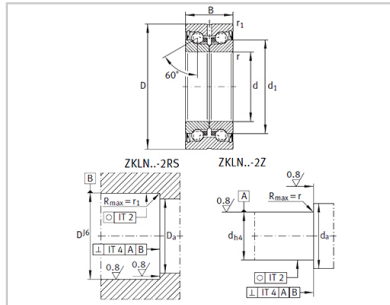

Bearing number : ZKLN50110-2RS2)

Weightm ≈ kg : 2.5

Dimensions(mm) :

d-0.005 :	50
Tolerance :	0/-0.005
D-0.010 :	110
Tolerance :	0/-0.01
B -0.25 :	54
d :	80
r min :	0.6
r min :	0.6

Installation
dimension(mm) :

D max :	98
d min :	63

Basic load ratingaxial :

DynamicN :	113000
StaticN :	250000
limitspeed nGgreenmin – 1 :	1200
Bearing Frictiontorque MRL Nm :	2.6
Axial stiffness CaL N/ μ m :	1400
OverturningstiffnessckL Nm/ mrad :	1500
Mass moment of inertia 1) Mm kg · cm2 :	15.2
Axial eat4) μ m :	2.5
Bearing number 1 :	ZMA50/7 5
Bearing number 2 :	AM50

Lockingtorque3) MA Nm :	150
AxialpreloadN :	29436

: