


Screw Rod Support Bearings

Non bolt installation ZKLN-2Z.2RSd40_one hundred-ZKLN60110-2Z

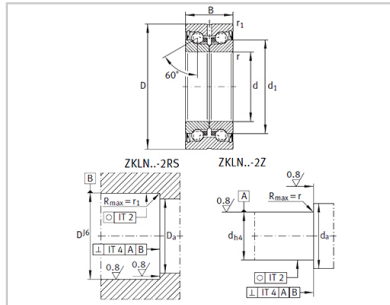

Bearing number :	ZKLN60110-2Z
Weightm ≈ kg :	2.2
Dimensions(mm) :	
d-0.005 :	60
Tolerance :	0/-0.008
D-0.010 :	110
Tolerance :	0/-0.015
B -0.25 :	45
d :	85
r min :	0.6
r min :	0.6
Installation dimension(mm) :	
D max :	100
d min :	82
Basic load ratingaxial :	
DynamicN :	84000
StaticN :	214000
limitspeed nGgreenmin – 1 :	3000
Bearing Frictiontorque MRL Nm :	1
Axial stiffness CaL N/ μ m :	1300
OverturningstiffnessckL Nm/ mrad :	1650
Mass moment of inertia 1) Mm kg · cm2 :	13.7
Axial eat4) μ m :	3
Bearing number 1 :	ZMA60/9 8
Bearing number 2 :	AM60

Lockingtorque3) MA Nm :	100
AxialpreloadN :	17893

: